

## HD3HDIHX

### EQUIP® SERIES 1080p TDN H.264 INDOOR FIXED IP MINI-DOME CAMERA

Honeywell's latest addition to the EQUIP® Series of IP-based products, the HD3HDIHX is a high definition, True Day/Night indoor fixed mini-dome network camera engineered to provide extremely crisp images at minimal bandwidth. The HD3HDIHX provides 1080p (1920 x 1080) resolution at full frame rate. Progressive scan technology and 2D edge enhancement provide outstanding clarity and definition. Digital Noise Reduction results in significant storage savings without sacrificing image quality in low light. The 1/2.7" progressive scan CMOS sensor offers the latest in digital video surveillance technology with accurate colour rendition through a wide variety of lighting conditions. The HD3HDIHX also supports the PSIA specification for interoperability between network video products.

The compact, one piece design provides fast and easy installation in any application. The camera comes complete with surface and flush mounting options (compatible with a 4S electrical box) and an optional wall/pendant mount kit is available.

In addition to the low light colour performance, the camera will automatically switch to black and white. In this mode, lighting can be complemented with infrared for discreet/covert low light surveillance with exceptional monochrome images.

A 3-D axis gimbal capable of 360° of pan, 180° of tilt and 360° of horizontal rotation simplifies mechanical camera adjustment. The Motorized Focus and Zoom (MFZ) lens allows the field of view to be adjusted to suit the scene requirements, and an onboard analogue output allows the installer to connect a local test monitor while adjusting the scene.

A powerful and intuitive web client allows fine tuning of the camera and the auto iris levels. This can also be performed from most NVR setup utilities.

The HD3HDIHX supports dual video streams and multiple compression formats with rates up to 30 frames per second (25 fps for PAL systems). The digital compression parameters for the two video streams are independently configurable. The HD3HDIHX features analogue video out for aiming and focusing.

With built-in low current Power over Ethernet (IEEE 802.3af), power is supplied to the camera using standard network cabling, eliminating the need for a separate power supply and associated wiring. In retrofit situations where PoE switching does not exist, the unit can also be powered directly from 24 VAC.

#### Market Opportunities

The HD3HDIHX is perfect for installations where excellent picture clarity at minimal bandwidth is required. At three times the resolution of standard analogue cameras, yet with similar bandwidth requirements, the HD3HDIHX can be retrofitted on many existing DVR/NVR installations without requiring additional storage.

#### Features

- Outstanding image quality, 1080p (1920 x 1080) resolution
- 30 fps (25 fps PAL) progressive scan
- True Day/Night, 3-9 mm MFZ lens with mechanical IR cut filter
- Camera tamper detection
- Video motion detection
- Wall/pendant mount kit available
- Selectable compression formats
- PSIA support
- Dual digital video streams simultaneously, independently configurable
- Remote firmware update
- Supports both dynamic and static IP addresses
- Single model for surface mount and recessed ceiling applications, 4S adapter plate also supplied
- Includes advanced IP locator software to make system setup easy
- Web server for remote setup of camera video and network parameters
- Choice of 24 VAC or PoE IEEE 802.3af power inputs
- Supports input and output alarm contacts
- Supports bidirectional audio



HD

HD3HDIHX shown with mounting ring for surface mount



HD

HD3HDIHX shown without mounting ring for flush mount


# HD3HDIHX

## SPECIFICATIONS

Like all cameras in the EQUIP IP Series, the HD3HDIHX network camera uses Honeywell technology for video motion detection, tamper detection, remote firmware updating and for secure storage of all camera settings. Video motion detection recognises object motion within the field of view, then a simple on-screen notification alerts the user. Camera tamper detection notifies the user when a camera's field of view is altered, blinded or blurred. This ensures the video's integrity and alerts the customer to either a live event or a system problem that is causing disruption to the video stream. Honeywell's technology also allows users to remotely upload firmware to the camera. Setup is quick and easy and can be customised through a web client or from an NVR. The built-in web server provides password protected access to the camera's video and network setup.



### System Diagram

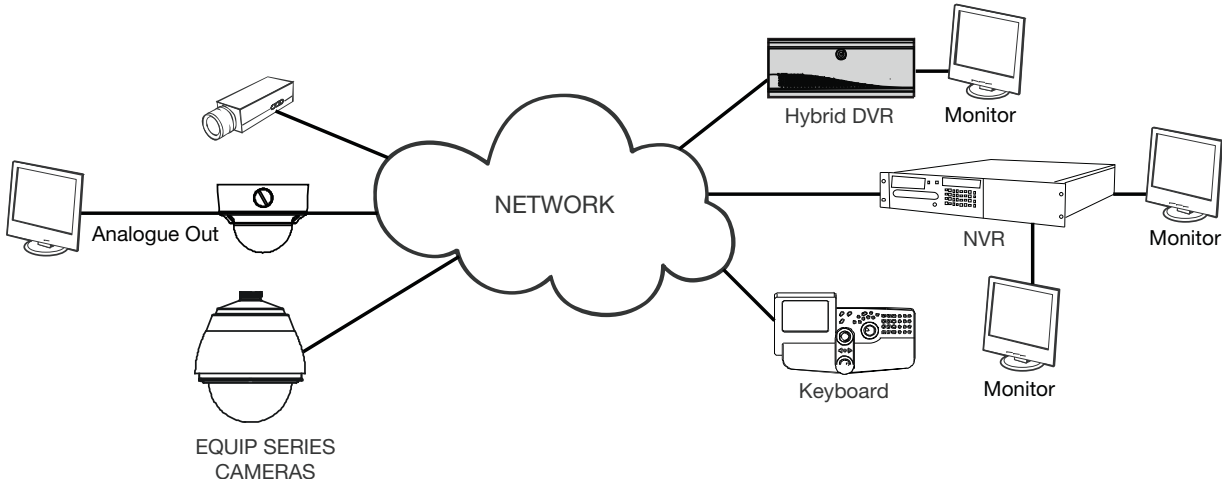

# HD3HDIHX

## SPECIFICATIONS

Operational			
Video Standard	NTSC, PAL		
Scanning System	Progressive scan		
Image Sensor	1/2.7" CMOS		
Number of Pixels (H x V)	1920 x 1080		
Minimum Illumination	0.25 lux colour/0.22 lux BW @ 50 IRE, F1.2 0.11 lux colour/0.09 lux BW @ 30 IRE, F1.2		
Automatic Lens Control	DC Iris Level 1-25		
Video Output (AUX)	1.0 Vp-p @ 75 Ohms		
S/N Ratio	50 dB or more (AGC off)		
Auto Gain Control	Off/On, selectable (20-40 dB)		
Automatic Electronic Shutter	1/30 - 1/130,000 sec (NTSC) 1/30 - 1/130,000 sec (PAL)		
Lens Type	True Day/Night (TDN), 3 mm-9 mm Motorized Focus and Zoom, F1.2		
Angle of View		Wide	Tele
	Horizontal	93.0°	31.7°
	Vertical	68.4°	23.8°
White Balance	Auto, Manual, WBC Push		
Audio/Two-Way	Line in/out		
Electrical			
Input Voltage	24 VAC, PoE IEEE 802.3af		
Input Range	17-28 VAC		
Surge Suppression	1.5 kW transient		
Power Consumption	5 W (max) PoE: PD Type 1 Class 2		
Mechanical			
Dimensions (W x H x D)	See Diagram		
Weight	0.47 kg camera only		
Construction	Housing: Polycarbonate and Diecast aluminium Finish: Matt texture, off white		
Connector	Video Output: 2-pin Molex connector Power Input: Removable screw block Network: RJ45 connector Alarm I/O: Removable screw block Audio In: Removable screw block Audio Out: Removable screw block		

Environmental				
Temperature	Operating: -10°C to 50°C Storage: -20°C to 60°C			
Relative Humidity	0% to 85%, non-condensing			
IP Specifications				
Video Compression	Dual stream H.264 and MJPEG			
Primary Stream Resolution	Bitrate H.264 (Typical)*	Frame Rate	Storage/Day (GB)	
	1920 x 1080	3.0 Mbps	30/25	31.6
	1280 x 720	1.4 Mbps	30/25	14.8
	800 x 450	0.75 Mbps	30/25	7.91
	640 x 360	0.4 Mbps	30/25	4.22
320 x 180	0.2 Mbps	30/25	2.11	
Frame Rate NTSC/PAL	Up to 30/25 fps video in all resolutions			
Video Streaming	Dual streaming: H.264 and MJPEG Controllable frame rate and bandwidth Constant or variable bit rate			
Security	Multiple user access levels with password protection			
Video Access from Web Browser	Full control of all camera settings available to administrator			
Minimum Web Browsing Requirements	Pentium IV CPU 3.1 GHz or faster 2 GB RAM Windows XP®, Windows 7 (32/64), Windows 2K8 (64) Internet Explorer 6, 7, 8 or 9			
Installation and Management Maintenance	Honeywell IP Utility software identifies the IP address, discovers cameras, supports firmware upgrades			
Supported Protocols	HTTP, TCP, RTSP, RTP, UDP, ARP, DNS, RTCP, FTP, ICMP, DHCP, Bonjour, IGMP, Telnet			
Standards	PSIA support			
Regulatory				
Emissions	FCC part 15B, CE (EN55022)			
Immunity	CE (EN50130-4)			
Safety	EU: EN60950-1:2006			


\*Actual bitrate is scene and motion dependent with H.264 stream.

# HD3HDIHX

## SPECIFICATIONS

System Integration
<b>Open IP Integration</b>
PSIA support and open API for real interoperability between Honeywell and other manufacturers' IP-enabled security devices. Refer to the Honeywell Open Technology Alliance [ <a href="http://www.honeywell.com/security/hota">http://www.honeywell.com/security/hota</a> ] to learn more about our open and integrated solutions.

Accessories	
Housing and Mounts	
HD3-MK1	Wall/Pendant Mount Kit, Off White

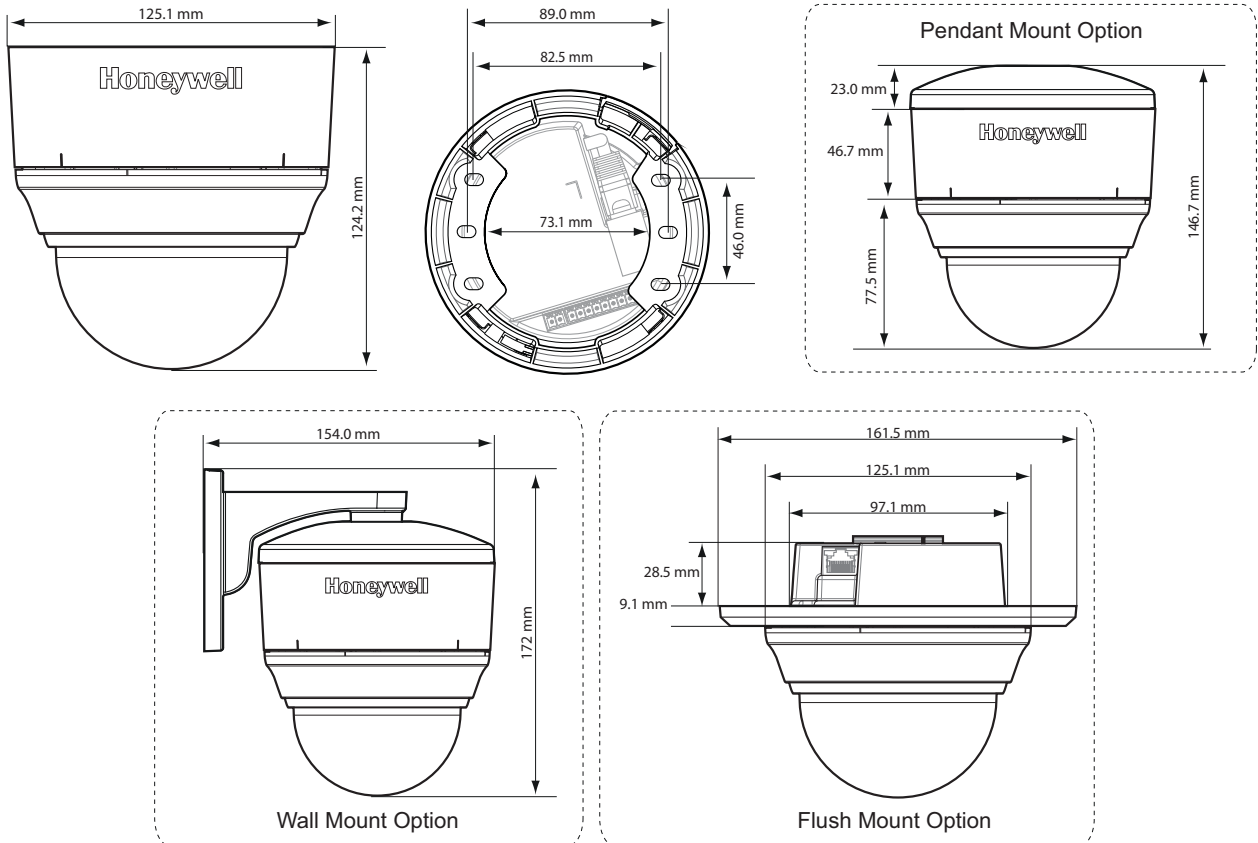

Ordering	
HD3HDIHX	Network True Day/Night, 1/2.7" Progressive Scan, CMOS, 1080p Resolution Camera, 3-9 mm MFZ, 24 VAC or PoE IEEE 802.3 af, H.264, PAL

**NOTE:** Honeywell reserves the right, without notification, to make changes in product design or specifications.

**For additional information,**  
please visit [www.honeywell.com/security/uk](http://www.honeywell.com/security/uk)

### Honeywell Security Group

Aston Fields Road  
Whitehouse Industrial Estate  
Runcorn  
Cheshire  
WA7 3DL  
Tel: 08448 000 235  
[www.honeywell.com](http://www.honeywell.com)

HVS-HD3HDIH-01-UK(0112)DS-E  
January 2012  
© 2012 Honeywell International Inc.

# Honeywell